SPECIFICATIONS

MODEL NUMBER	SC-T3130 / SC-T3130N	SC-T3130X	SC-T5130				
Printer Width	24"		36"				
Printing Technology							
Print Head	PrecisionCore TFP Printhead						
Nozzle Configuration	3,200 nozzles (800 nozzles x 4 d	channels x 1 head)					
Maximum Resolution	2,400 x 1,200 dpi						
Minimum Ink Droplet Volume	4.0 pl	3.5 pl	4.0 pl				
Line Accuracy	±0.1% or ±0.26 mm						
Print Speed	CAD (A1): 34 seconds		CAD (A1): 31 seconds				
Ink System							
Ink Type	UltraChrome XD2 Pigment Ink	Black: Pigment, Colour: Dye	UltraChrome XD2 Pigment Ir				
Colours	Cyan, Magenta, Yellow, Black						
Paper Handling							
Maximum Roll Diameter / Weight	2" core, Max 110 mm/3kg	2" core, Max 119 mm/4.2kg	2" core, Max 110 mm/5kg				
Paper Width	Roll: 329 mm - 610 mm	Roll: 297 mm - 610 mm	Roll: 329 mm - 914 mm				
	Cutsheet: 210 mm - 610 mm		Cutsheet: 210 mm - 914 mn				
Side Margin	3mm						
Media Thickness	Roll: 0.05 mm to 0.21 mm, ASF.	Cutsheet: 0.12 mm to 0.27 mm	ı				
Auto-Sheet Feeder	A4 to A3						
Paper Capacity for ASF	50 sheets plain paper / 5 sheets	special media					
Connectivity							
Interface	USB 3.0, Ethernet (100BASE-T)	(/1000BASE-T), Wi-Fi (IEEE802.	11b/g/n)				
Wi-Fi Direct	Wi-Fi Direct (Simple AP)						
Control Panel	4.3" Touch Screen						
Printer Languages	ESC/P raster, HP-GL/2HP RTL						
Scanner Integration	Epson WorkForce DS-530						
	Epson WorkForce DS-650						
	Epson WorkForce DS-60000						
Memory	1GB						
Operating System Requirements	Windows XP SP3 or later / Vista / 7 / 8 / 8.1 / 10, Windows Server 2003 / 2008 / 2012 / 2016 / 20						
	Mac OS X 10.6.8 or later						
Electrical Specifications							
Rated Voltage / Frequency / Current	AC 100 to 240V, 50/60Hz, 1.4A						
Power Consumptions	Operating: Approx. 28W	Operating: Approx. 22W	Operating: Approx. 28W				
	Ready: Approx. 8W	Ready: Approx. 8W	Ready: Approx. 8W				
	Sleep: Approx. 1.6W	Sleep: Approx. 1.6W	Sleep: Approx. 1.6W				
	Power Off (Stand by):	Power Off (Stand by):	Power Off (Stand by):				
	Approx. 0.2W	Approx. 0.2W	Approx. 0.2W				
Environmental Conditions							
Environmental Conditions Temperature	Operating: 10°C to 35°C. Storag	ae: -20°C to 40°C					
Temperature	Operating: 10°C to 35°C, Storag		Condensation)				
Temperature Humidity	Operating: 20 - 80% (No Conde	nsation), Storage: 5 - 85% (No (Condensation)				
Temperature Humidity Sound Pressure	Operating: 20 - 80% (No Conde Operating: Approx. 49dB(A), Sle	nsation), Storage: 5 - 85% (No (Condensation)				
Temperature Humidity Sound Pressure Sound Power	Operating: 20 - 80% (No Conde	nsation), Storage: 5 - 85% (No (Condensation)				
Temperature Humidity Sound Pressure Sound Power Printer Dimensions	Operating: 20 - 80% (No Conde Operating: Approx. 49dB(A), Sle Operating: Approx. 7.5B(A)	nsation), Storage: 5 - 85% (No (ep: Approx. 32dB(A)					
Temperature Humidity Sound Pressure Sound Power Printer Dimensions Dimension With Stand (W x H x D)	Operating: 20 - 80% (No Conde Operating: Approx. 49dB(A), Sle Operating: Approx. 7.5B(A) 970 x 913 x 696 mm	nsation), Storage: 5 - 85% (No (ep: Approx. 32dB(A)	1,268 x 913 x 696 mm				
Temperature Humidity Sound Pressure Sound Power Printer Dimensions Dimension With Stand (W x H x D) Dimension Without Stand (W x H x D)	Operating: 20 - 80% (No Conde Operating: Approx. 49dB(A), Sle Operating: Approx. 7.5B(A) 970 x 913 x 696 mm 970 x 230 x 505 mm	nsation), Storage: 5 - 85% (No 6 ep: Approx. 32dB(A) 970 x 928 x 577 mm 970 x 245 x 577 mm	1,268 x 913 x 696 mm 1,268 x 230 x 505 mm				
Temperature Humidity Sound Pressure Sound Power Printer Dimensions Dimension With Stand (W x H x D) Dimension Without Stand (W x H x D) Weight With Stand	Operating: 20 - 80% (No Conde Operating: Approx. 49dB(A), Sle Operating: Approx. 7.5B(A) 970 x 913 x 696 mm 970 x 230 x 505 mm 38 kg	nsation), Storage: 5 - 85% (No (ep: Approx. 32dB(A) 970 x 928 x 577 mm 970 x 245 x 577 mm 40 kg	1,268 x 913 x 696 mm 1,268 x 230 x 505 mm 46 kg				
Temperature Humidity Sound Pressure Sound Power Printer Dimensions Dimension With Stand (W x H x D) Dimension Without Stand (W x H x D) Weight With Stand Weight Without Stand	Operating: 20 - 80% (No Conde Operating: Approx. 49dB(A), Sle Operating: Approx. 7.5B(A) 970 x 913 x 696 mm 970 x 230 x 505 mm 38 kg 27 kg	nsation), Storage: 5 - 85% (No (ep: Approx. 32dB(A)) 970 x 928 x 577 mm 970 x 245 x 577 mm 40 kg 29 kg	1,268 x 913 x 696 mm 1,268 x 230 x 505 mm 46 kg 33 kg				
Temperature Humidity Sound Pressure Sound Power Printer Dimensions Dimension With Stand (W x H x D)	Operating: 20 - 80% (No Conde Operating: Approx. 49dB(A), Sle Operating: Approx. 7.5B(A) 970 x 913 x 696 mm 970 x 230 x 505 mm 38 kg	nsation), Storage: 5 - 85% (No (ep: Approx. 32dB(A)) 970 x 928 x 577 mm 970 x 245 x 577 mm 40 kg 29 kg	1,268 x 913 x 696 mm 1,268 x 230 x 505 mm 46 kg 33 kg				

Dimensions and Weight

SC-T3130



SC-T3130N



SC-T3130X



SC-T5130



Reproduction in part or in whole, without the written and EXCEED YOUR VISION are registered trademarks and other company names used herein are for or registered trademarks of their respective owners Epson disclaims any and all rights in those marks. Print samples shown are simulations only. Specifications notice and may vary between countries. Please check with local Epson offices for more information.

Information correct at time of printing Printed December 2023

SPECIFICATIONS

MODEL

Printing

Print Head

Print Spe Ink Syste Ink Type Colours Paper Ha

Nozzle C Maximur Minimum Line Accu Minimur

IUMBER	SC-T3130M	SC-T5130M						
idth	24"	36"						
echnology								
	PrecisionCore TFP Printhead							
nfiguration	3,200 nozzles (800 nozzles x 4 channel	s x 1 head)						
Resolution	2,400 x 1,200 dpi							
nk Droplet Volume	4.0 pl	3.7 pl						
асу	±0.1% or ±0.26 mm							
ine Width	0.07mm*1 (0.02mm*2)							
ed	CAD (A1): 34 seconds	CAD (A1): 31 seconds						
m								
	UltraChrome XD2 Pigment Ink							
	Cyan, Magenta, Yellow, Black							
ndling								
Roll Diameter / Weight	2" core, Max 110 mm/3kg	2" core, Max 119 mm/5.9kg						
th	Roll: 329 mm - 610 mm	Roll: 297mm - 914 mm						
	Cutsheet: 210 mm - 610 mm	Cutsheet: 210 mm - 914 mm						

Side Margin Roll: 0.05 mm to 0.21 mm. ASE/Cutsheet: 0.12 mm to 0.27 m Media Thickness

Auto-Sheet Feeder Paper Capacity for ASF Scanning Sensor RGB LED Light Source Optical Resolution 600 dpi Scan Speed (200 dpi) 1.5 ips (Colour) / 4.5 ips (Mor Minimum Document Size 148 mm x 148 mm Maximum Document Size JPEG, PDF (Single Page), PDF (Multi Page), PDF/A (Single/Multi), TIFF Scan Formats Scan to Destination Scan to Network Folder, Scan to FTP Server, Scan to Email, Scan to Memory Device Copy

77 sec (Colour) / 60 sec (Mono) Copy Speed 25 to 400% Scaling

Connectivity USB 3.0, Ethernet (100BASE-TX/1000BASE-T), Wi-Fi (IEEE802.11b/g/n) Interface Wi-Fi Direct Wi-Fi Direct (Simple AP) 4.3" Touch Screen Control Panel ESC/P raster, HP-GL/2HP RT Printer Languages 1GB + 8GB *3 Memory PDF *4, TIFF, JPE Windows XP SP3 or later / Vista / 7 / 8 / 8.1 / 10, Windows Server 2003 / 2008 / 2012 / 2016 / 2019,

Mac OS X 10.6.8 or later **Electrical Specifications**

Rated Voltage / Frequency / Current AC 100 to 240V, 50/60Hz, 1.4A Operating: Approx. 24W

Operating: Approx. 26W Ready: Approx. 11W Ready: Approx. 12W Sleep: Approx. 2.0W Sleep: Approx. 2.0W Power Off (Stand by): Approx. 0.2W Power Off (Stand by): Approx. 0.2W

Environmental Conditions Temperature

Operating: 10°C to 35°C, Storage: -20°C to 40°C Operating: 20 - 80% (No Condensation), Storage: 5 - 85% (No Condensation) Humidity Sound Pressure Operating: Approx. 47dB(A) Operating: Approx. 50dB(A) Sound Power Operating: Approx. 6.6B(A)

Printer Dimensions Dimension With Stand (W x H x D) Dimension Without Stand (W x H x D) 970 x 292 x 505 mm

Power Consumptions

Weight With Stand 44.4 kg Weight Without Stand What's In The Box Printer, Printer Stand *5, Initial Ink Cartridge, AC Power Cable, Setup Guide, Software CD-Rom, Maintenenace Box

1-year Warranty

970 x 974 x 696 mm

Warranty

1 ISO/IEC 24790, Single weight matte paper, CAD/Line Drawing, Max Quality, High Speed=Off, Finest Detail=On.

*3 For scanner data processing.
*4 PDF available only for files scanned by integrated scanner.
*5 No stand included for SC-T3130M model.

EPSON INDIA PVT. LTD. 12th Floor, The Millenia, Tower A, No.1, Murphy Road, Ulsoor, Bangalore - 560 008 Tel: 080-4566 5000 Fax: 080-4566 5005

Scan the QR code or Click here to contact an Epson representative close to you.







CONTACT EPSON TODAY! EMAIL: pravin@eid.epson.co.in

Epson Helpline: For product info or service - 1800 425 0011 For service: 1800 123 001 600 or 1860 3000 1600 (9 am - 6 pm) (Mon - Sat)

1,268 x 975 x 696 mm

N/A

54.8 kg

Dimensions and Weight



SC-T5130M



© 2023 Epson India Pvt. Ltd. All Rights Reserved. Reproduction in part or in whole, without the written and EXCEED YOUR VISION are registered trademarks and other company names used herein are for or registered trademarks of their respective owners Print samples shown are simulations only. Specification notice and may vary between countries. Please check

EPSON

GO BIG ON **POSSIBILITIES** AND PRECISION.



Distinctive Quality Meets Endless Possibilities For Your Creative Ideas.

Take your ideas to a bigger scale with greater performance and precision with the Epson SureColor T-series printers. With PrecisionCore printhead technology and UltraChrome XD2 ink*2 to bring about fast printing speeds, enjoy a seamless work process and top-class accuracy in every print. Showcase your ideas and plans in a big way right down to the finest detail.

GO BIG on the details and find out more from our printing experts.



IT'S IN THE DETAILS.



Detailed Accuracy

PrecisionCore printhead technology produces impressive accuracy and sharpness at outstanding speeds.

Reliable Efficiency

In-built functions such as Continuous Ink Supply System*3 and seamless scan to print ensure high productivity.

Small Footprint

Minimally designed to fit effortlessly into tight working spaces.

*1 SC-T3130X stand is optional and is not included in the initial packaging. *2 For SC-T3130/T3130M/T5130/T5130M only. *3 For SC-T3130X only

LARGE FORMAT PRINTERS

SURECOLOR™ SC-T3130/T3130N/T3130X/T3130M/T5130/T5130M




For accuracy right down to the finest details, the Epson SureColor T-series printers fulfils all your business needs. Using core technologies such as PrecisionCore printheads and UltraChrome XD2 ink, prints are delivered at an outstanding speed with impressive accuracy and clarity. Let your ideas impress your audience with prints that are consistently fast, precise and reliable.

PrecisionCore Printhead Technology




Equipped with the next-generation PrecisionCore printhead technology as well as Variable Size Dot Technology, piezo elements are used to mechanically eject ink from the SureColor T-series' PrecisionCore Micro TFP printhead, allow the ink droplets to be controlled to the finesse of 3.5 picolitres, producing incredibly precise line detail, sharp text and photographic-quality graphics. T-series' industry-leading output quality and accuracy will provide a reliable and productive long-term operation.



Impressive Print Speeds


The PrecisionCore printhead technology enables remarkable print speeds that will print A1 printouts in 31 seconds*.

*Print speed is based on the SC-T5130.



Nozzle Verification Technology

Print without interruptions with the advanced built-in Nozzle Verification Technology (NVT). This technology monitors nozzle health and adjusts print quality automatically without interruption, even during printing.





Compact, User-friendly Design

Control At Your Fingertips


A 4.3 inch touch panel on the T-series gives you the convenience of an easy setup and a PC-less operation that just makes things extra efficient.



Small Footprint

Sleek and minimally designed, the T-series is of a comfortable size that fits into tight work spaces effortlessly. At just 970 x 245 x 577mm without the stand, the SC-T3130X has one of the smallest footprint in its class.



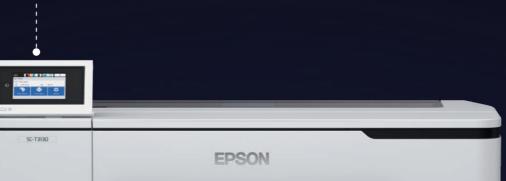

Trusted Productivity

Ink Tank System

The SC-T3130X increases cost savings as it brings on a seamless workflow, eliminating the need for ink replacements making it convenient to print right from smart devices that will delay print jobs. With an efficiently designed ink tank and system, ink refills during print jobs can be easily and effortlessly done, without compromising on efficiency.



Wireless Connectivity

The T-series is integrated with Wi-Fi and Wi-Fi Direct, anywhere in the office. The Wi-Fi Direct function acts as an access point, allowing devices to connect directly to the printer without a router.

Additionally, the T-series printers come equipped to allow direct wireless printing from any Apple devices through Apple AirPrint*, without the need for any additional drivers.

*Apple AirPrint is a trademark of Apple Inc

Epson Cloud Solution PORT

Epson Cloud Solution PORT is a cloud-based solution for Epson end users. This software provides users with the status of the connected printer and alerts for troubleshooting if required. The Production Monitor allows users to visualise printer operational status, track usage and print job cost, conveniently from their PC or smart devices.



Seamless Scan To Print

Scan and enlarge your printouts in just four easy steps without needing to connect to a computer. Using compatible Epson scanners* for the SC-T3130/T3130N/T3130X/T5130, you can seamlessly scan and print directly from the T-series printers.









Recommended scanners: WorkForce DS-530, DS-6500, DS-60000.

	Model	Size	SC-T3130/SC-T5130/ SC-T3130M/SC-T5130M	SC-T3130X		100 70400	l co T 0400V	l 60 T E400	l co T 040014	l co ==1001
_	BL LLLO LIL		<u> </u>		Options	SC-13130	SC-13130X	SC-15130	SC-T3130M	SC-T5130M
INK CARTRIDGES	Black Ink Cartridge	50ml	C13T40A100		Roll Feed Spindle (24")					
	Cyan Ink Cartridge	26ml	C13T40A200		C12C933211					
	Magenta Ink Cartridge	26ml	C13T40A300		Roll Feed Spindle (36")					
	Yellow Ink Cartridge	26ml	C13T40A400		C12C933131					
	Black Ink Cartridge	80ml	C13T40B100		Printer Stand (24")					
	Cyan Ink Cartridge	50ml	C13T40B200		C12C933151	•	•		•	
	Magenta Ink Cartridge	50ml	C13T40B300		Printer Stand (34")					
	Yellow Ink Cartridge	50ml	C13T40B400		C12C933091			•		•
INK BOTTLES	Black Ink Bottle	140ml	-	C13T49K100	Document Carrier Sheet (A1)					
	Cyan Ink Bottle	140ml		C13T49K200	C12C936101				_	
	Magenta Ink Bottle	140ml		C13T49K300	Document Carrier Sheet (A0)					
	Yellow Ink Bottle	140ml		C13T49K400	C12C936461					