
LARGE FORMAT PRINTER SURECOLOR™ SC-S40670/S60670





The new Epson SureColor™ S Series printers are Epson's next generation of high-performance eco-solvent signage printers, which incorporates the latest printing technologies to be Epson's most advanced signage printers to date. The printers come with the new sophisticated precision media feeding system, high-performance PrecisionCore™ TFP printheads and a myriad of advanced features that enable them to reliably meet most demanding jobs while minimising operation costs.



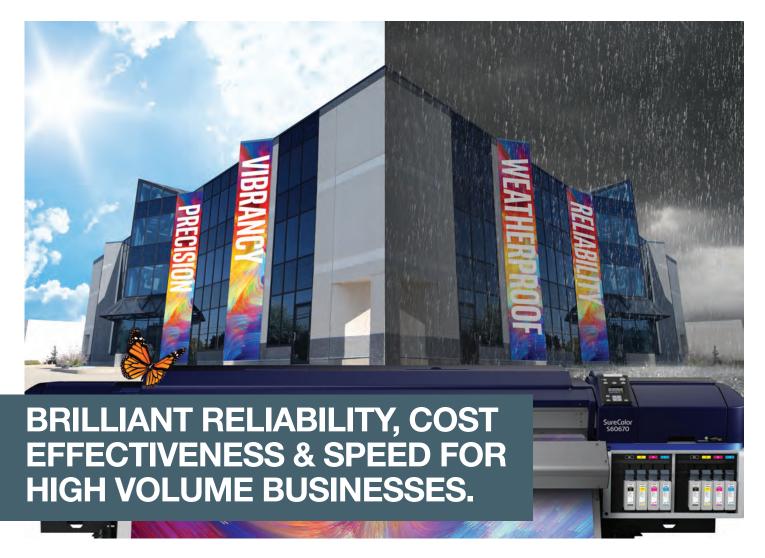



SC-S60670

Epson UltraChrome™ GS3 ink is Greenguard Gold certified and meets the French-VOC A+ Class criteria for low chemical emissions.















Genuine Inks

Environmentally Friendly





		GS 3	MAXIMUM MEDIA WIDTH				PRINT SPEEDS SQM/HR HIGH QUALITY PRODUCTION**	
•	SC-S40670	ULTRACHROME	64"	700ML	SINGLE	8.6	16.6	
	SC-S60670	GS3INK	04	/ UUIVIL	DIIAI	146	31.6	

ENGINEERED FOR BUSINESS

Exceptional Print Quality

Showcasing Epson's industry-leading PrecisionCore™ printhead technology and UltraChrome® GS3 ink, expect consistently vibrant quality with every print.

Superb Reliability

High-volume printing is made ultra-reliable with an advance precision media feeding system to ensure you minimal downtime.

Engineered for Convenience

Automatic media alignment, printhead cleaning and remote management features ensure you great ease during operations.





^{*} Only available on the SC-860670.
** Based on 8-pass printing for high quality and 4-pass printing for production, on banner media



MODEL NUMBER	SC-S40670	SC-S60670	Dimensions & Weight		
SKU No.	C11CE44403	C11CE46403	SC-S40670		
Printer Width	64"		Weight: 279 kg (without ink)		
Printing Technology			_	*	
Print Head	PrecisionCore™ TFP® Printhead	Dual PrecisionCore™ TFP® Printhead	-	1	
Nozzle Configuration	360 x 2 nozzles each colour (x4)	360 x 2 x 2 nozzles each colour (x4)		1,338 mm	
Maximum Resolution	1440 x 1440 dpi				
Minimum Ink Droplet Volume	4.2 pl			•	
Print Speed				\downarrow	
Max Speed - 1 pass	Up to 58.4 m ² /h (360 x 720 dpi)	Up to 95.3 m ² /h (360 x 720 dpi)		/	
High Speed - 2 pass (Billboard)	Up to 29.4 m ² /h (720 x 720 dpi)	Up to 52.3 m²/h (720 x 720 dpi)	2,620 mm	/ 880 mm	
Production 1 - 3 pass	Up to 20.8 m²/h (720 x 720 dpi)	NA NA	_		
Production 2 - 4 pass	Up to 16.6 m ² /h (720 x 720 dpi)	Up to 31.6 m²/h (720 x 720 dpi)	— SC-S60670		
Production 3 - 6 pass	Up to 11.0 m ² /h (720 x 1440 dpi)	Up to 20.7 m²/h (720 x 1440 dpi)	Weight: 291 kg (without ink)		
High Quality - 8 pass	Up to 8.6 m ² /h (720 x 1440 dpi)	Up to 14.6 m²/h (720 x 1440 dpi)			
Max Quality 1 - 12 pass	Up to 4.7 m ² /h (1440 x 1440 dpi)	Up to 8.7 m ² /h (1440 x 1440 dpi)			
Max Quality 2 - 16 pass	Up to 3.5 m ² /h (1440 x 1440 dpi)	Up to 6.8 m²/h (1440 x 1440 dpi)		1,338 mm	
Max Quality 3 - 24 pass	Up to 2.6 m²/h (1440 x 1440 dpi)	Up to 4.9 m ² /h (1440 x 1440 dpi)		,,000	
Ink System					
Ink Type	Epson UltraChrome™ GS3 Ink Technology			p. ↓	
Colours	4 colours - Cyan, Magenta, Yellow, Black		0.000	972 mm	
Ink Capacity	700 ml ink cartridge		2,620 mm	972111111	
Paper Handling		_			
Media Type	NA	Rear roll feed (2" / 3" core with max 250 mm diameter and up to 45 kg); Auto take-up reel			
Printable Area	Max printing width: 1616 mm; Side Margin: 5 mm	— 700 ml Ink Cartridges			
Media Width	300 to 1626 mm	Black	C13T892100		
Media Thickness	Up to 1 mm	Cyan	C13T892200		
Heaters	Pre- and Platen- Heater (30 to 50 °C); After-Heate	Magenta	C13T892300		
Control Panel	2.7" Colour LCD	Yellow	C13T892400		
Connectivity	2.7 Golda EGB		Supplies & Optional Accessories		
Printer Interfaces	Hi-Speed USB 2.0, 100BASE-TX / 1000BASE-T				
Printer Languages	Standard: ESC/P raster	350 ml Cleaning Cartridge	C13T696000		
Printer Drivers	NA	Maintenance Parts Kit Ink Cleaner	C13S210044 C13T699300		
Memory	512 MB main + 128 MB network	Cleaning Stick	C13S090013		
Software	Standard: CD Installer, Communication Driver, EP	Clean Room Wiper	C13S090016		
Contware	Information, Epson Control Dashboard, EpsonNet	Waste Ink Bottle	C13T724000		
	Software Updater	Additional Print Drying System	C12C932381		
		Media Holding Guide	C12C932411		
Other Features	Auto Head Alignment Technology (Media feed and				
	Report System, Custom Paper Backup		_		
Power and Operating Requirements					
Power Requirements	Input voltage AC 100-240 V 50/60 Hz		_		
Power Consumption	Operating: Approx. 480 W; Standby: Approx.	Operating: Approx. 745 W; Standby: Approx.			
	330 W w/ heater ON; Sleep: Approx. 12 W;	445 W w/ heater ON; Sleep: Approx. 13 W;			
	Power Off: Less than 1.5 W	Power Off: Less than 1.8 W	_		
Recommended Operating			© 2017 Epson India Pvt. Ltd. All Rights F Reproduction in part or in whole, without		
Temperature & Humidity	15 - 35 °C; 20 - 80 % RH (non-condensing)		 permission from Epson, is strictly prohibi 	ted. EPSON and	
Printer Dimensions			EXCEED YOUR VISION are registered tra Epson Corporation. All other products no	ames and other	
Dimensions	2,620 x 880 x 1,338 mm (W x D x H) (storage)			tification purposes d trademarks of their	
Weight	279 kg (without ink)			and all rights	
	Substrate Support System (C12C932361)	Substrate Support System (C12C932361),	in those marks. Print samples shown are Specifications and product availability are		
Bundled Items			Specifications and product availability are		
		Additional Print Drying System (C12C932381)	without notice and may vary between co check with local Epson offices for more i	untries. Please	

Information correct at time of printing. Printed in January 2018

EPSON INDIA PVT. LTD.

Regional Offices: 12th Floor, The Millenia, Tower A, No.1,

Murphy Road, Ulsoor, Bangalore - 560 008. Tel: 080-30515000 Fax: 080-30515005

Ahmedabad - 3314 8500, Chennai - 3967 7500, Cochin - 4012 315, Coimbatore - 98942 19200, Hyderabad - 6463 9640/41, Kolkata - 6500 9370/77, Mumbai - 3079 8200, New Delhi - 3312 0300/01, Pune - 3028 6000/05

www.epson.co.in

CONTACT EPSON TODAY! EMAIL: vasu@eid.epson.co.in

 $\textbf{SOUTH} \ \text{Alok Singh } 098405 \ 03210, \ \text{Harishankar } 098802 \ 85075 \ \textbf{NORTH} \ \text{Akhtar Imam } 099101 \ 08780, \ \text{Ashutosh Kumar } 098153 \ 94550, \ \text{Ashutosh Kumar } 098153 \ 945500,$ Sudhir Kumar 093898 35156 EAST Sourov Kumar 098746 72616 WEST Millind 098209 74733, Devendra 098509 49453.





